

## Description

The edge lit Ledge 105 utilises high output LEDs and the latest optical control technology to create bright, even illumination across a single or double sided tension fabric graphic display.

The Ledge 105 is a freestanding graphic display system, but can also be wall mounted or ceiling suspended.

Ledge 105 is available in custom sizes up to 2.25m wide x 3m high and is suitable for easy self-assembly.

## Key Attributes


- Flat packed for reduced shipping costs
- Double or single sided graphic illumination available within one product
- Option to add Ledge Fix magnetic merchandising system

## LED Details

Operating Voltage	120V~277V AC
Operating Frequency	50~60Hz
Power Factor	>0.98 Typical <sup>3</sup>
Total Power Consumption <sup>1</sup>	26.5W per square metre
LED	Seoul
LED Quantity	10 per metre
Drive Current	0.7A
PCB Power Consumption	2.2W per LED
LED Colour Temperature <sup>2</sup>	5700K
LED Lifetime <sup>4</sup>	>36,000 hours

Assuming Power Supply efficiency of 80%
Power Factor is dependent on Power Supply Unit and Load

2. 5700K typical. +/- 250K 4. Based on Manufacturers data at 55 degrees celcius

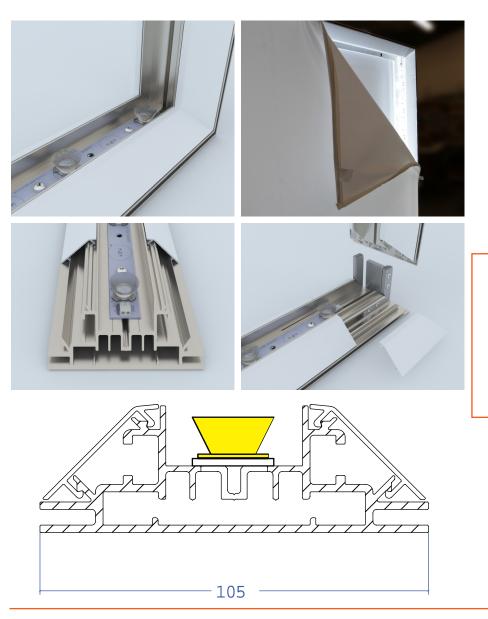



www.lumenal.co.uk info@lumenal.co.uk 0845 277 6000

